

## Wire Clip

No screw facilitate quick assembly

Suitable tabs for easy mounting

Material free of toxic substances

Wide range of application diameters

Rounded edges to prevent scratches


Electrolytic galvanised coating providing high corrosion resistance

Special design for easy application





**FOR OUTER DIAMETERS (OD)**  
From **7,3 mm** up to **20,6 mm Ø**

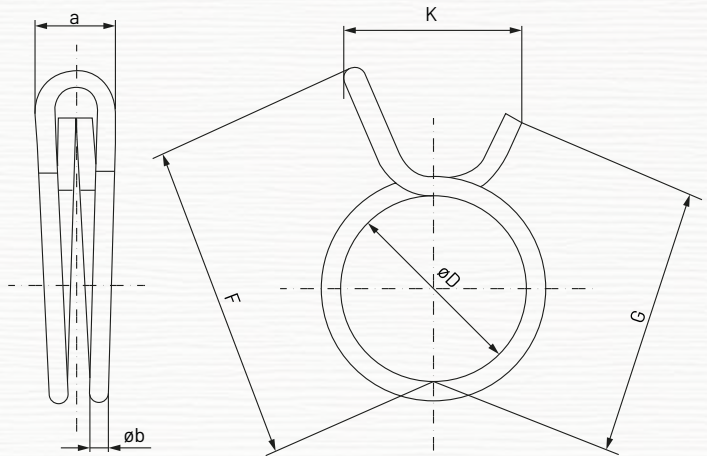

Wire clips are designed especially for use in low pressure applications with small bore hoses, with or without an outer helix.

This is a competitively priced clip for use where high clamping force is not required.

The spring steel used to manufacture this clip ensures that it adapts to the application diameter regardless of the pressure at any given moment.

W1

**MATERIAL:** Spring steel  
TS 2500 EN 10270-1 SH  
**FINISH:** Zinc plated Cr3  
**CORROSION RESISTANCE:** 48 hours salt spray  
ASTM B-117

Part Number	a Max.	b Ø	K Max.	F		G		Box Quantity	Outer Box Quantity
				Max.	Min.	Max.	Min.		
02016012	5,20	1,00	9,50	14,50	14,00	12,50	12,00	1.000	8.000
02016020	5,50	1,00	9,50	14,75	14,25	12,85	12,35	1.000	8.000
02016039	5,50	1,00	9,50	15,15	14,65	13,45	12,95	1.000	8.000
02016047	5,50	1,00	9,50	15,55	15,05	14,05	13,55	1.000	8.000
02016055	5,50	1,00	9,50	16,60	16,10	14,30	13,80	1.000	8.000
02016063	6,30	1,20	13,00	18,55	17,55	16,55	15,55	1.000	8.000
02016071	6,30	1,20	13,00	20,15	19,15	17,75	16,75	1.000	8.000
02016080	6,30	1,20	13,00	20,45	19,45	18,55	17,55	1.000	8.000
02016098	7,30	1,50	16,00	22,35	20,85	19,15	18,35	500	4.000
02016100	7,30	1,50	16,00	23,60	22,60	20,90	20,10	500	4.000
02016119	7,30	1,50	16,00	23,65	22,65	21,45	20,65	500	4.000
02016127	7,30	1,50	16,00	25,00	24,00	22,30	21,50	500	4.000
02016135	8,40	1,80	15,00	27,10	25,60	24,80	23,30	500	4.000
02016143	8,40	1,80	16,50	28,80	27,30	25,70	24,20	500	4.000
02016151	8,40	1,80	17,00	30,20	28,70	26,30	24,80	500	4.000
02016160	8,40	1,80	17,50	29,95	28,45	26,68	25,15	500	4.000
02016178	9,60	1,90	17,50	31,80	30,30	28,30	26,80	500	4.000
02016186	9,90	2,00	18,00	32,90	31,40	29,10	27,60	500	4.000
02016194	9,90	2,00	18,00	34,00	32,60	30,10	28,60	500	4.000