

## EAR Clips


Rounded band edges which prevent cutting or damage to the hose.

All clips and clamps are marked with the clamping range and the Mikalor logo.

Cr6-free surface treatment in compliance with RoHS.

Wide variety of models which cover many applications.

Easy and quick to mount.

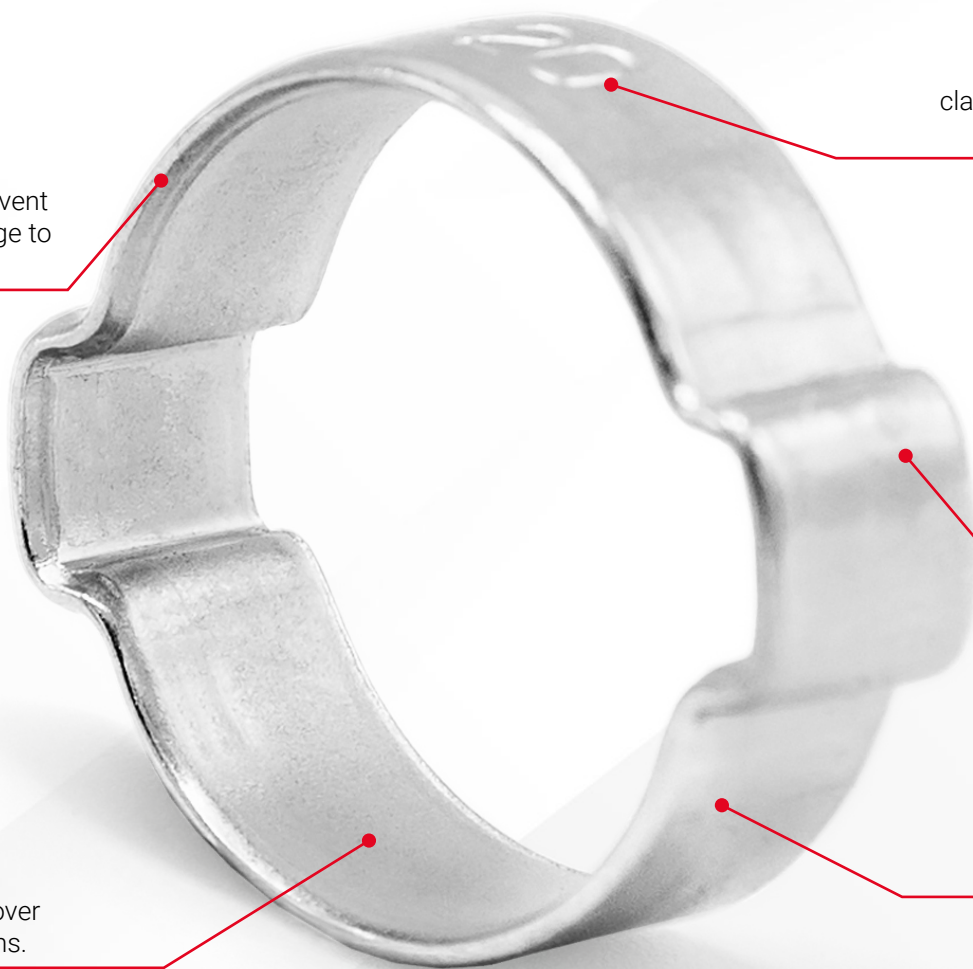

**The most practical solution  
for small-diameter applications**




Ear clips are a practical solution for small-bore hoses which are easy to mount.

Models with one or two ears can be installed using a simple pair of pincers and guarantee a safe, durable and tamper proof assembly.

When clamping soft-wall hose, the models with inner-ring can be used in order to protect the hose from being pinched during assembly.

Ear clamps are widely used in hydraulics and pneumatics, and are also very common in the agriculture sector.

## Assembly

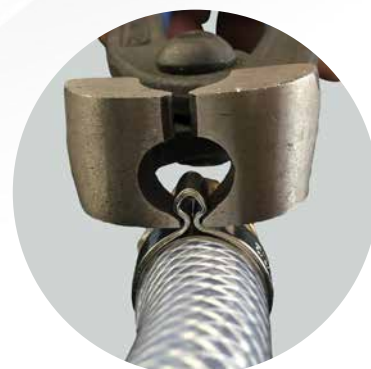

### One Ear



From Ø 7 mm up to Ø 20 mm

### One Ear with Inner-Ring



From Ø 7,5 mm up to Ø 19,3 mm

### Two Ears



From Ø 5 mm up to Ø 46 mm

W1

W4

**MATERIAL:** Steel **W1** DC04 (EN 10139)  
**FINISH:** Zinc-plated Cr3  
**CORROSION RESISTANCE:** 72 hours Salt Spray (ASTM B-117)

**MATERIAL:** Steel **W1** DC04 (EN 10130)  
Stainless steel inner-ring  
AISI 301  
**FINISH:** Zinc-plated Cr3  
**CORROSION RESISTANCE:** 72 hours Salt Spray (ASTM B-117)

**MATERIAL:** Steel **W1** DC04 (EN 10139)  
**FINISH:** Zinc-plated Cr3  
**CORROSION RESISTANCE:** 72 hours Salt Spray (ASTM B-117)

**MATERIAL:** Stainless Steel **W4** AISI 304 1.4301 (EN 10088-2:2005)  
**CORROSION RESISTANCE:** 400 hours Salt Spray (ASTM B-117)

**MATERIAL:** Stainless Steel **W4** AISI 304 1.4301 (EN 10088-2:2005)  
Stainless steel inner-ring  
AISI 301  
**CORROSION RESISTANCE:** 400 hours Salt Spray (ASTM B-117)

**MATERIAL:** Stainless Steel **W4** AISI 304 1.4301 (EN 10088-2:2005)  
**CORROSION RESISTANCE:** 400 hours Salt Spray (ASTM B-117)